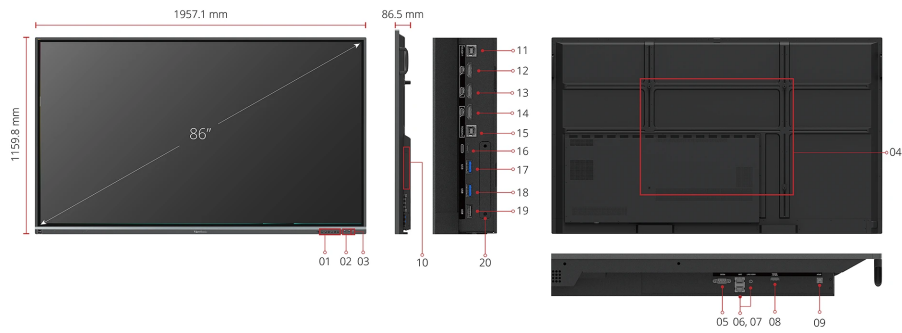# ViewSonic®

ViewBoard IFP8650-5F

Key **Features**

- Ultra Fine Touch Technology offering up to 40-point touch for a pen-on-paper writing experience
- myViewBoard Whiteboard software with engaging classroom tools
- Screen share via USB-C or wirelessly via myViewBoard Display and ViewBoard Cast with Airplay and Chromecast
- Intuitive remote device control and multimedia broadcast with myViewBoard Manager
- Android 13 OS powered by an octa-core CPU for optimized efficiency and security

Product **Description**

Designed with modern educators in mind, the ViewBoard® 50-5F Series offers an intuitive and interactive interface for a multi-user writing experience. With a single-cable USB-C for instant, worry-free connectivity, teachers can seamlessly plug-in and control their devices while continuing the lesson. Both students and educators enjoy smooth writing with Ultra Fine Touch Technology offering 40-point touch, and the dual-pen that comes in a range of colors and sizes. Rest assured you and your students' eyes are cared for and protected as the ViewBoard® 50-5F Series comes with Flicker-Free technology and an integrated TÜV certified blue light filter for all brightness levels.

Fully integrated with the myViewBoard suite, the ViewBoard® 50-5F Series brings together hardware and software for a complete classroom solution. Compatible with a full line of accessories, the ViewBoard® 50-5F Series enables you to effectively teach with a variety of engaging tools.

1. Menu Control	8. HDMI OUT	15. TOUCH 2
2. USB 3.0	9. SPDIF	16. USB Type-C
3. USB 2.0	10. OPS Slot	17. USB 3.0
4. VESA® Wall Mount (800x600mm)	11. TOUCH 1	18. USB 3.0
5. RS-232	12. HDMI 1	19. USB 2.0
6. LAN	13. HDMI 2	20. Wi-Fi Module Slot
7. AUDIO OUT	14. HDMI 3	

Visit Us   www.viewsonic.com

DISPLAY

Panel Size:	86"
Panel Type:	TFT LCD Module with DLED Backlight. IPS
Display Area (mm):	1913.0(H) x 1084.0 (V)
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160
Colors:	1.07B colors (10bit)
Brightness:	500 nits
Contrast Ratio:	1200:1 (typ.) 6000:1 (DCR)
Response Time:	8ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 hours (Min)
Surface Treatment:	Hardness: 7H, Anti-glare coating
Bezel:	Slim
Orientation:	Landscape
Disclaimer:	50,000 hours backlight life at 8 hours of use per day

PLATFORM

Processor:	ARM Cortex-A73*4 + Cortex-A53*4
RAM:	8GB
Storage:	64GB

TOUCH

Type/ Tech:	Ultra Fine Touch Techology (IR Recognition)
Touch Resolution:	32768 ×32768
Touch Point:	Windows: 40 points of touch, Android : 20 points of touch

INPUT

HDMI:	2.0 x 3 (3840x2160 @60Hz, HDCP2.2, HDMI1 with CEC/ARC) with audio signal transmission
RS232:	x1
OPS:	x1
WiFi:	x 1 module slot

OUTPUT

HDMI:	x1 (4K@60Hz)
Audio:	x1 (Earphone out)
SPDIF:	x1 (optical)

LAN

RJ45:	x2

USB

Type A:	2.0 x 2 3.0 x 4

EMBEDDED OS

Android 13

BUNDLE SOFTWARE

Basic Annotation Software:	myViewBoard
Pro Annotation Software:	myViewBoard for Windows (Embedded in Windows Slot-in PC)
Wireless Presentation:	vCast/myViewBoard Display App

SPECIAL FEATURES

All-in-one USB port:	"SmartPort™ USB" to all channels.
Simple LAN sharing between IFP and slot-in device:	Yes
Light Sensor:	Yes

POWER

Voltage:	100-240VAC +/- 10% Wide Range
Consumption:	158W(typ.), 0.5W (off)

ERGONOMICS

Wall Mount (VESA®):	800 mm x 600 mm

OPERATING CONDITIONS

Temperature (º C):	0°C to 40°C
Humidity:	10% ~ 90% RH non-condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	77.05 x 45.66 x 3.41 in / 1957.1 x 1159.8 x 86.5 mm
Packaging (inch / mm):	83.07 x 50.51 x 8.86 in / 2110 x 1283 x 225 mm

WEIGHT

Net (lb / kg):	147.05lb/66.7kg
Gross (lb / kg):	191.58lb/86.9kg

REGULATIONS

cTUVus, FCC/ICES003, Energy Star 8.0, EMC/CE, CB/ LVD, GOST-R/EAC, UkrSEPRO, EPEAT, Mexico NOM , Mexico Energy, UKCA, UK-EEL, BSMI, BIS, LBL(Low Blue Light Certification), Flicker Free, Green BOM, RoHS, ErP-Eco, REACH, SCIP, WEEE, TPCH , Packing waste, CA65, PAIA

PACKAGE CONTENTS

1. Power cord

2. Remote control with AAA battery

3. Touch USB cable

4. Touch pen x 2

(VB-PEN-009)

5. Quick Start Guide + Compliance statement

6. RS232 adapter

7. Clamp x 5

8. Camera Plate

9. Screw x 8

| Type B: | x2, for touch | 10. HDMI cable |
| Type C: | x1 (DP 1.2, USB2.0, PD65W, Ethernet 100M) with audio signal transmission | |

SPEAKERS

20W x 2 + 20W x 1 subwoofer

TOP CAMERA PLATE

Yes