



VIEWBOARD

ViewBoard IFP6552-2F

Key Features


- EDLA certified with access to Google apps
- Seamless plug-and-play connectivity with triple USB-C ports
- Intuitive Android™ 13 customizable launcher with draggable apps and widgets
- Advanced security controls and compliance standards that safeguard your data
- Enhanced collaboration with integrated myViewBoard software powered by Octa-core CPU



*Google, Android, YouTube, Google Maps and other marks are trademarks of Google LLC.

Product Description

Tap into limitless learning with the ViewBoard IFP52-2F Series. Certified under the Android Enterprise Device License Agreement (EDLA), it seamlessly harmonizes the Android™ 13 operating system with myViewBoard software and Google Play Store access to deliver enriched learning experiences enhanced by robust security features. Collaborate with split-screen multitasking; enjoy seamless connectivity and streamlined workflows empowered by triple USB-C ports and vCast wireless screen casting; and captivate remote and in-person students alike using its built-in microphones and front-facing speaker. Complete with a full range of compatible accessories, it invigorates learning experiences to take student engagement to new heights.

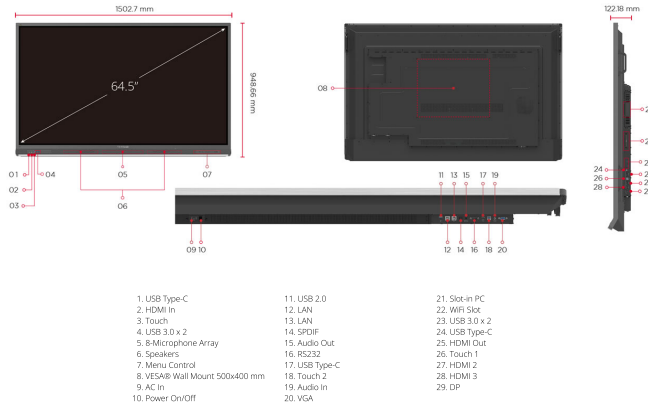

Visit Us www.viewsonic.com

DISPLAY

Panel Size:	65"
Panel Type:	TFT LCD Module with DLED Backlight, VA
Display Area (mm):	1428.48(H) x 803.52 (V) (64.5" diagonal)
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160(Pixels)
Colors:	1.07B colors
Brightness:	350 nits (typ)
Contrast Ratio:	4000:1(Typ.) 5000:1(Min. with DCR enabled)
Response Time:	≤7ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 hrs (typ).
Surface Treatment:	Hardness: 7H. Anti-glare coating
Orientation:	Landscape

PLATFORM

Processor:	Octa-Core CPU (A73*4 + A53*4)
RAM:	8GB
Storage:	64GB

TOUCH

Type/ Tech:	UFT (Ultra Fine Touch) Technology
Touch Resolution:	32767 x 32767
Touch Point:	Windows: 40 points touch, Android: 20 points touch

INPUT

HDMI:	x3 (Frontx1:HDMI2.0 with CEC ; Rearx2:HDMI2.1 with CEC/ARC & HDMI 2.0 with CEC)
RGB / VGA:	x1
DisplayPort:	x1
Audio:	x1 (PC audio in)
RS232:	x1
OPS:	module slot x 1

OUTPUT

HDMI:	x1
Audio:	x1 (Earphone out)
SPDIF:	x1

LAN

RJ45:	x2
-------	----

USB

Type A:	USB3.0 x 4 (Front x 2; Rear x 2) USB 2.0x1 (Rear)
Type B:	USB 3.0 x3(Front x1; Rear x 2)
Type C:	x3 (Front x1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rear x1 with USB3.0, DP1.2, Ethernet 100M, PD 100W; Rear x1 with USB3.0 data only)

SPEAKERS

15W x 2 front soundbar + 15W x 1 subwoofer

MICROPHONE

built-in 8-array microphone

TOP CAMERA PLATE

Yes

EMBEDDED OS

Android 13

BUNDLE SOFTWARE

Basic Annotation Software:	myViewBoard WhiteBoard for Android
Pro Annotation Software:	myViewBoard WhiteBoard for Windows (embedded in VPC)
	myViewBoard Display, vCast, AirSync™
Wireless Presentation:	*myViewBoard Display will be replaced by AirSync in Q1 2025.

SPECIAL FEATURES

All-in-one USB port:	USB 3.0 "SmartPort USB" to all channels.
Simple LAN sharing between IFP and slot-in device:	10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000)
Light Sensor:	Yes

POWER

Voltage:	100-240VAC +/- 10% Wide Range
Consumption:	91.41W (Energy Star) / Off: <0.5W

ERGONOMICS

Wall Mount (VESA®):	500 x 400
----------------------	-----------

OPERATING CONDITIONS

Temperature (° C):	0°C to 40°C
Humidity:	20% ~ 80% RH non-condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	1502.7 x 948.66 x 122.18 mm / 59.161 x 37.349 x 4.81 in
Packaging (inch / mm):	1618 x 1060 x 225 mm / 63.7 x 41.7 x 8.9 in

WEIGHT

Net (lb / kg):	130.1 lb/59kg
Gross (lb / kg):	149.9lb/68kg

REGULATIONS

NRTL w/ CA, FCC-B w, DOE Energy Star, DOE EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE

PACKAGE CONTENTS

1. 3m power cord by ship area
2. Remote control with AAA battery (new VS remote control)
3. 3m touch USB cable
4. Touch pen x 2 (a set)
5. Quick Start Guide + Compliance statement
6. RS232 adapter
7. Clamp x 5
8. Camera Plate
9. Screw x 8 (camera 2+2, wall mount 4)
10. HDMI cable 3m
11. AAA Battery x 2
12. Compliance statement

COMPATIBLE SLOT-IN PC

VPC2-O series/VPC2-O-1B series/VPC12-WPO-15/16



VIEWBOARD

ViewBoard IFP7552-2F

Key Features


- EDLA certified with access to Google apps
- Seamless plug-and-play connectivity with triple USB-C ports
- Intuitive Android™ 13 customizable launcher with draggable apps and widgets
- Advanced security controls and compliance standards that safeguard your data
- Enhanced collaboration with integrated myViewBoard software powered by Octa-core CPU



*Google, Android, YouTube, Google Maps and other marks are trademarks of Google LLC.

Product Description

Tap into limitless learning with the ViewBoard IFP52-2F Series. Certified under the Android Enterprise Device License Agreement (EDLA), it seamlessly harmonizes the Android™ 13 operating system with myViewBoard software and Google Play Store access to deliver enriched learning experiences enhanced by robust security features. Collaborate with split-screen multitasking; enjoy seamless connectivity and streamlined workflows empowered by triple USB-C ports and vCast wireless screen casting; and captivate remote and in-person students alike using its built-in microphones and front-facing speaker. Complete with a full range of compatible accessories, it invigorates learning experiences to take student engagement to new heights.

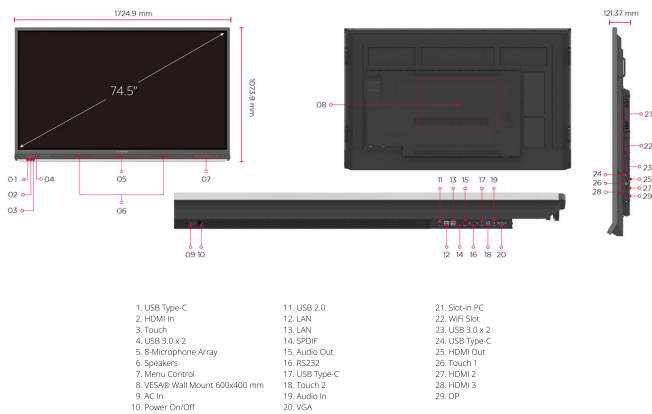

Visit Us

www.viewsonic.com

DISPLAY

Panel Size:	75"
Panel Type:	TFT LCD Module with DLED Backlight, VA
Display Area (mm):	1650.24 (H) x 928.26 (V) (74.5" diagonal)
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160(Pixels)
Colors:	1.07B colors
Brightness:	350 nits (typ)
Contrast Ratio:	5000:1(Typ.) 5000:1(Min. with DCR enabled)
Response Time:	≤7ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 hrs (typ).
Surface Treatment:	Hardness: 7H. Anti-glare coating
Orientation:	Landscape

PLATFORM

Processor:	Octa-Core CPU (A73*4 + A53*4)
RAM:	8GB
Storage:	64GB

TOUCH

Type/ Tech:	UFT (Ultra Fine Touch) Technology
Touch Resolution:	32767 x 32767
Touch Point:	Windows: 40 points touch, Android: 20 points touch

INPUT

HDMI:	x3 (Frontx1:HDMI2.0 with CEC ; Rearx2:HDMI2.1 with CEC/ARC & HDMI 2.0 with CEC)
RGB / VGA:	x1
DisplayPort:	x1
Audio:	x1 (PC audio in)
RS232:	x1
OPS:	module slot x 1

OUTPUT

HDMI:	x1
Audio:	x1 (Earphone out)
SPDIF:	x1

LAN

RJ45:	x2
-------	----

USB

Type A:	USB3.0 x 4 (Front x 2; Rear x 2) USB 2.0x1 (Rear)
Type B:	USB 3.0 x3(Front x1; Rear x 2)
Type C:	x3 (Front x1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rear x1 with USB3.0, DP1.2, Ethernet 100M, PD 100W; Rear x1 with USB3.0 data only)

SPEAKERS

15W x 2 front soundbar + 15W x 1 subwoofer

MICROPHONE

built-in 8-array microphone

TOP CAMERA PLATE

Yes

EMBEDDED OS

Android 13

BUNDLE SOFTWARE

Basic Annotation Software:	myViewBoard WhiteBoard for Android
Pro Annotation Software:	myViewBoard WhiteBoard for Windows (embedded in VPC)
	myViewBoard Display, vCast, AirSync
Wireless Presentation:	*myViewBoard Display will be replaced by AirSync in Q1 2025

SPECIAL FEATURES

All-in-one USB port:	USB 3.0 "SmartPort USB" to all channels.
Simple LAN sharing between IFP and slot-in device:	10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000)
Light Sensor:	Yes

POWER

Voltage:	100-240VAC +/- 10% Wide Range
Consumption:	124.06W (Energy Star) / Off: <0.5W

ERGONOMICS

Wall Mount (VESA®):	600 x 400
----------------------	-----------

OPERATING CONDITIONS

Temperature (° C):	0°C to 40°C
Humidity:	20% ~ 80% RH non-condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	1724.96 x 1073.96 x 121.37 mm / 67.912 x 42.282 x 4.778 in
Packaging (inch / mm):	1850 x 1160 x 225 mm / 72.8 x 45.7 x 8.9 in

WEIGHT

Net (lb / kg):	152.1lb/69kg
Gross (lb / kg):	174.2lb/79kg

REGULATIONS

NRTL w/ CA, FCC-B w, DOE Energy Star, DOE EPEAT, CE EMC, LVD or CB, RoHS Green BOM, RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE

PACKAGE CONTENTS

1. 3m power cord by ship area
2. Remote control with AAA battery (new VS remote control)
3. 3m touch USB cable
4. Touch pen x 2 (a set)
5. Quick Start Guide + Compliance statement
6. RS232 adapter
7. Clamp x 5
8. Camera Plate
9. Screw x 8 (camera 2+2, wall mount 4)
10. HDMI cable 3m
11. AAA Battery x 2
12. Compliance statement

COMPATIBLE SLOT-IN PC

VPC2-O series/VPC2-O-1B series/VPC12-WPO-15/16



VIEWBOARD

ViewBoard IFP8652-2F

Key Features


- EDLA certified with access to Google apps
- Seamless plug-and-play connectivity with triple USB-C ports
- Intuitive Android™ 13 customizable launcher with draggable apps and widgets
- Advanced security controls and compliance standards that safeguard your data
- Enhanced collaboration with integrated myViewBoard software powered by Octa-core CPU



*Google, Android, YouTube, Google Maps and other marks are trademarks of Google LLC.

Product Description

Tap into limitless learning with the ViewBoard IFP52-2F Series. Certified under the Android Enterprise Device License Agreement (EDLA), it seamlessly harmonizes the Android™ 13 operating system with myViewBoard software and Google Play Store access to deliver enriched learning experiences enhanced by robust security features. Collaborate with split-screen multitasking; enjoy seamless connectivity and streamlined workflows empowered by triple USB-C ports and vCast wireless screen casting; and captivate remote and in-person students alike using its built-in microphones and front-facing speaker. Complete with a full range of compatible accessories, it invigorates learning experiences to take student engagement to new heights.

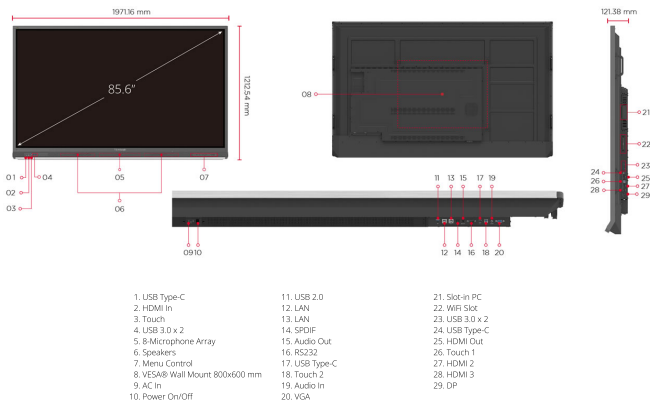

Visit Us

www.viewsonic.com

DISPLAY

Panel Size:	86"
Panel Type:	TFT LCD Module with DLED Backlight, VA
Display Area (mm):	1895.04 (H) x 1065.96 (V) (85.6" diagonal)
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160(Pixels)
Colors:	1.07B colors
Brightness:	350 nits (typ)
Contrast Ratio:	4000:1(Typ.) 5000:1(Min. with DCR enabled)
Response Time:	≤7ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 hrs (typ).
Surface Treatment:	Hardness: 7H. Anti-glare coating
Orientation:	Landscape

PLATFORM

Processor:	Octa-Core CPU (A73*4 + A53*4)
RAM:	8GB
Storage:	64GB

TOUCH

Type/ Tech:	UFT (Ultra Fine Touch) Technology
Touch Resolution:	32767 x 32767
Touch Point:	Windows: 40 points touch, Android: 20 points touch

INPUT

HDMI:	x3 (Frontx1:HDMI2.0 with CEC ; Rearx2:HDMI2.1 with CEC/ARC & HDMI 2.0 with CEC)
RGB / VGA:	x1
DisplayPort:	x1
Audio:	x1 (PC audio in)
RS232:	x1
OPS:	module slot x 1

OUTPUT

HDMI:	x1
Audio:	x1 (Earphone out)
SPDIF:	x1

LAN

RJ45:	x2
-------	----

USB

Type A:	USB3.0 x 4 (Front x 2; Rear x 2) USB 2.0x1 (Rear)
Type B:	USB 3.0 x3(Front x1; Rear x 2)
Type C:	x3 (Front x1 with USB3.0, DP1.2, Ethernet 100M, PD 65W; Rear x1 with USB3.0, DP1.2, Ethernet 100M, PD 100W; Rear x1 with USB3.0 data only)

SPEAKERS

15W x 2 front soundbar + 15W x 1 subwoofer

MICROPHONE

built-in 8-array microphone

TOP CAMERA PLATE

Yes

EMBEDDED OS

Android 13

BUNDLE SOFTWARE

Basic Annotation Software:	myViewBoard WhiteBoard for Android
Pro Annotation Software:	myViewBoard WhiteBoard for Windows (embedded in VPC)
	myViewBoard Display, vCast, AirSync
Wireless Presentation:	*myViewBoard Display will be replaced by AirSync in Q1 2025.

SPECIAL FEATURES

All-in-one USB port:	USB 3.0 "SmartPort USB" to all channels.
Simple LAN sharing between IFP and slot-in device:	10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000)
Light Sensor:	Yes

POWER

Voltage:	100-240VAC +/- 10% Wide Range
Consumption:	148.12W (Energy Star) / Off: <0.5W

ERGONOMICS

Wall Mount (VESA®)::	800 x 600
-----------------------	-----------

OPERATING CONDITIONS

Temperature (° C):	0°C to 40°C
Humidity:	20% ~ 80% RH non-condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	1971.16 x 1212.54 x 121.38 mm / 77.605 x 47.738 x 4.779 in
Packaging (inch / mm):	2116 x 1330 x 225 mm / 83.3 x 52.4 x 8.9 in

WEIGHT

Net (lb / kg):	163.1lb/74kg
Gross (lb / kg):	185.2lb/84kg

REGULATIONS

NRTL w/ CA, FCC-B w, DOE Energy Star, DOE EPEAT, CE EMC, LVD or CB, RoHS Green BOM, & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE

PACKAGE CONTENTS

1. 3m power cord by ship area
2. Remote control with AAA battery (new VS remote control)
3. 3m touch USB cable
4. Touch pen x 2 (a set)
5. Quick Start Guide + Compliance statement
6. RS232 adapter
7. Clamp x 5
8. Camera Plate
9. Screw x 8 (camera 2+2, wall mount 4)
10. HDMI cable 3m
11. AAA Battery x 2
12. Compliance statement

COMPATIBLE SLOT-IN PC

VPC2-O series/VPC2-O-1B series/VPC12-WPO-15/16